



**HAL**  
open science

## Understanding and modeling the thermal runaway of lithium-ion batteries

Thi Thu Dieu Nguyen, Amandine Lecocq, Julien Bernard, Martin Petit, Guy Marlair, Sylvie Grugeon, Stéphane Laruelle

► **To cite this version:**

Thi Thu Dieu Nguyen, Amandine Lecocq, Julien Bernard, Martin Petit, Guy Marlair, et al.. Understanding and modeling the thermal runaway of lithium-ion batteries. 32. International Electric Vehicle Symposium (EVS 32), May 2019, Lyon, France. ineris-03237716

**HAL Id: ineris-03237716**

**<https://ineris.hal.science/ineris-03237716>**

Submitted on 26 May 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

*EVS32 Symposium  
Lyon, France, May 19-22, 2019*

## **Understanding and Modeling the Thermal Runaway of Lithium-ion Batteries**

Thi Thu Dieu NGUYEN<sup>1,2,3</sup>, Amandine LECOCCQ<sup>2</sup>, Julien BERNARD<sup>1</sup>, Martin PETIT<sup>1</sup>,  
Guy MARLAIR<sup>2</sup>, Sylvie GRUGEON<sup>3</sup>, Stéphane LARUELLE<sup>3</sup>

<sup>1</sup>*IFP Energies Nouvelles, Lyon site, Rond-point de l'échangeur de Solaize - BP3 - 69360 Solaize, France*

<sup>2</sup>*INERIS, Parc Technologique Alata - BP 2 - 60550 Verneuil-En-Halatte, France*

<sup>3</sup>*LRCS, UMR CNRS 7314, Hub de l'Énergie, Université de Picardie Jules Verne, 33 rue St Leu -80039, Amiens France*

*Corresponding author : thi-thu-dieu.nguyen@ifpen.fr*

---

### **Executive Summary**

The main safety issue pertaining to operating Li-ion batteries is relating to its sensitivity to thermal runaway. This project aims to go deeper into the understanding & modeling of this complex multiphysics phenomenon at cell scale, taking into account the influences of novel highly reactive technologies and ageing (calendar and due to use) with 2 target degradation mechanisms: SEI formation/growth and Lithium Plating.

In this presentation, the methodology of investigating the thermal runaway through experimental study are presented. The obtained results will be used to calibrate & validate the 3D extended Thermal runaway model in the future works of the project.

---

### **1 Project introduction**

Safety control of Lithium-ion (Li-ion) battery is essential. All the more energy/power demanding applications act as incentive towards highly reactive Li-ion batteries. Already dominating the consumer market, Li-ion batteries are expected to dominate also e-mobility and stationary applications in near future [1]. Incidents involving batteries undergoing thermal runaway are still recurrent and highly advertised by the media [2]. The thermal runaway is characterized by a deficit of energy evacuation versus energy accumulation in the cells leading to uncontrollable overheating of the battery system. This complex event involves multi-scale phenomena ranging from internal physico-chemical to battery components reactions (electrodes, electrolytes & separator) and further to the thermal propagation of cell core & safety devices (CID, PTC disk, Pressure disk, Button vent, steel can).

In the context of emerging higher capacity Li-ion batteries including Ni-rich high energy technologies, lithium plating also seems to have a notable impact on the behavior of lithium-ion cells in thermal abuse conditions through increased risk of short circuit, and hence higher sensitivity to thermal runaway [3,4].

Former IFPEN/INERIS project on the thermal runaway of Li-ion batteries has focused on the previous generation of Li-ion batteries (essentially LFP/Graphite) [5,6] which has shown that thermal runaway is triggered through a series of exothermic reactions which occur in cascade at higher or lower temperatures [6]. The work led to the development of a methodology to model the thermal runaway at cell scale and

subsequently to the prediction of the battery state of health. It was also found that SEI Growth driven calendar ageing seems to play a critical role in thermal runaway. However, the impact of SEI driven cycling ageing was not covered.

Accordingly, this project aims to go deeper into the understanding & modeling of the thermal runaway phenomenon of Li-ion batteries at cell scale, taking into account the influence of novel highly reactive technologies and the influence of ageing with 2 target degradation mechanisms: SEI formation/growth and Lithium Plating, in order to understand what are the keys to inherently safer highly reactive Li-ion batteries during usage.

3 main work packages (WPs) in the project have been defined and started:

- The first WP deals with the study of the effect of high energy density technologies on safety: Ni-rich positive electrode materials with a novel negative electrode technology: SiO<sub>x</sub>-Graphite Composites.
- The second WP aims at understanding underpinning mechanisms and relationship between calendar & cycling ageing and safety focusing on 2 target degradation mechanisms: SEI formation/growth as a function of temperature & Lithium Plating (under low temperature conditions).
- The final WP deals with the development of a consolidated thermal runaway 3D model and the implementation of test protocols for requested calibration and validation purposes of the model.

This three step research strategy relies on the achievements of several previous completed projects and on the combination and synergisms offered by combined experimental and modeling studies:

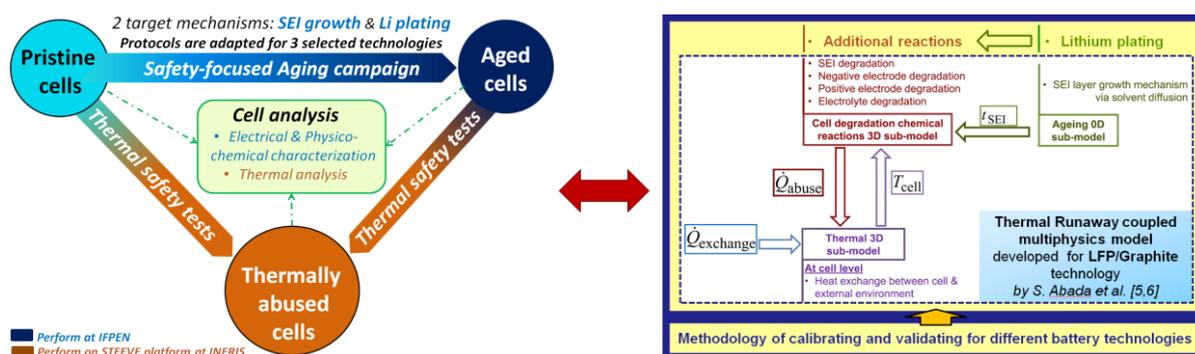


Figure 1: Project strategy: Combination of Experimental study (left) & Modeling study (right)

The modeling study is included in the final WP of the project which leads to the development of a 3D extended thermal runaway model in order to predict the behaviors of different Li-ion batteries nearby and during thermal runaway. This coupled multi-physics model will improve & extend the previous thermal runaway initial model build at IFPEN [6] by integrating the impact of lithium plating & SEI-driven cycling ageing.

At this stage, the first part of our project which is defining the methodology to investigate the thermal runaway through experimental study has been achieved and will be presented. This obtained results will be used to calibrate & validate the 3D extended Thermal runaway model build in the future WP of the project.

## 2 Methodology for thermal runaway investigation through experimental study

In this presentation, we will focus on the methodology of the experimental study. This study includes a safety-focused ageing campaign in order to artificially age battery samples, focusing on each target mechanism in a controlled and measurable way, the thermal safety tests in order to perform and calibrate the thermal runaway test. Pristine, aged and thermally abused cells will be analyzed by a complete multi-scale cell analysis.

## 2.1 Multi-scale cell analysis:

The cells will be analyzed at all stages (pristine, after certain level of ageing and after thermal runaway). Thermal safety test will also carry out the analysis of the composition of gases and particles emitted.

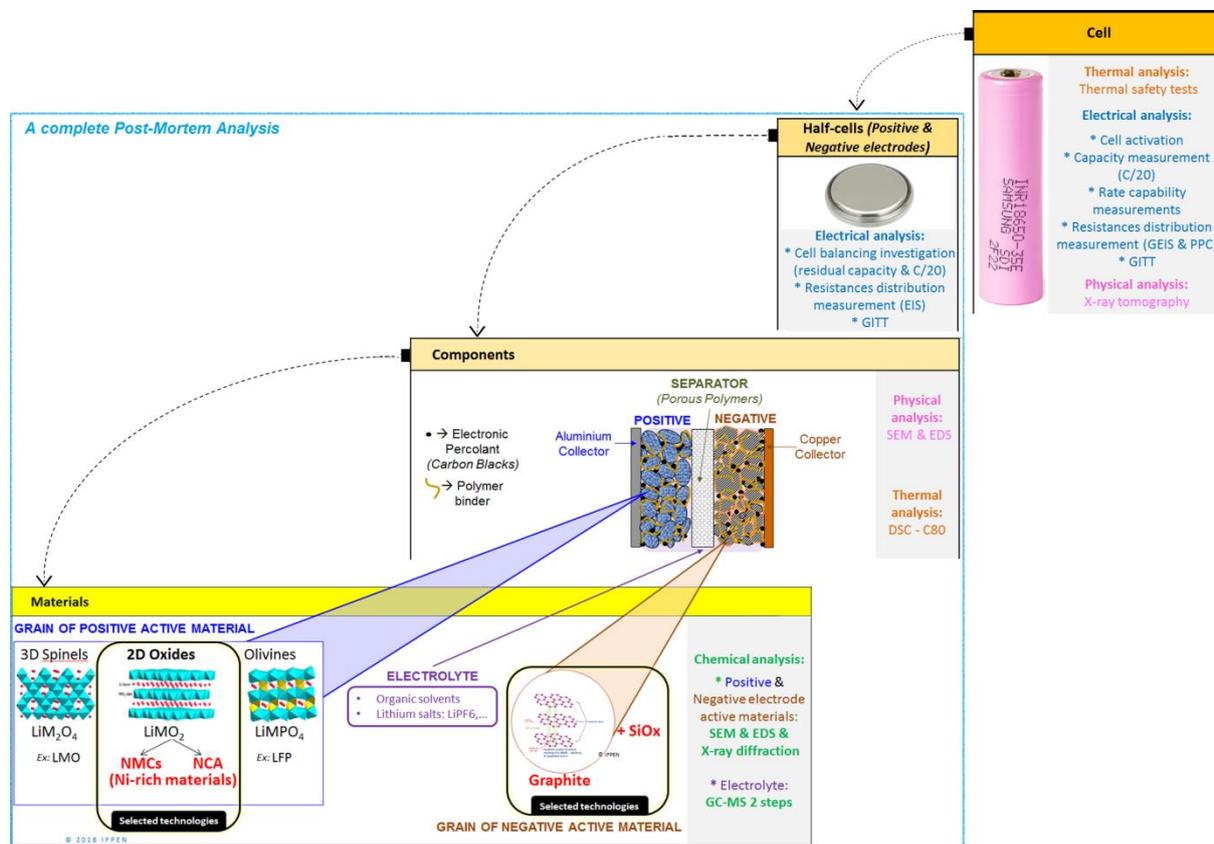


Figure 2: A complete multi-scale analysis of Li-ion battery cell

## 2.2 The impact of technology on Safety:

We will study different novel technologies of the new Lithium-ion battery generation. We selected 18650 Ni-rich high energy technologies:

SAMSUNG INR18650-35E, Panasonic NCR18650 GA and LG 18650 HG2.

A complete analysis are performed on pristine cells in order to identify the cell chemistry. The choice of Li-ion batteries technologies studied is well confirmed.

## 2.3 Safety-focused Ageing campaign:

Several pretests have been carried out to define a complete safety-focused ageing campaign with 2 target degradation mechanisms. Lithium plating ageing protocol is the cycling conditions at low temperature which accelerate the occurrence of lithium plating and SEI-driven ageing protocols are the storage/cycling conditions which accelerate the formation/growth of SEI but also minimize the occurrence of lithium plating (at high temperature). These protocols are customized to different technologies studied and to each other in order to have a comparable results.

Non destructive techniques of qualification and quantification of ageing state are also studied [7,8].

## 2.4 Thermal safety tests:

Pristine and aged cells obtained from the ageing campaign, in known and quantified degradation states, will undergo thermal safety tests on the STEEVE platform of INERIS. These tests will make it possible to

understand the processes involved in the thermal runaway of the batteries and to calibrate and validate the developed models. To go further in understanding the phenomenon, cells that have undergone runaway tests will also be analyzed, post-mortem.

## Acknowledgments

The authors gratefully acknowledge the supervision & the funding of IFPEN & INERIS and especially the guidance of LRCS for this work.

## References

- [1] Myung, Seung-Taek et. Al. (2016): *Nickel-Rich Layered Cathode Materials for Automotive Li-ion Batteries, Achievements and Perspectives*, In ACS Energy Lett. 2 (1), pp. 196–223.
- [2] Feng, Xuning et. Al. (2018): *Thermal Runaway mechanism of lithium ion battery for electric vehicles. A review*. In Energy Storage Materials 10, pp. 246–267.
- [3] Waldmann, Thomas et. Al. (2017): *Effects of rest time after Li plating on safety behavior—ARC tests with commercial high-energy 18650 Li-ion cells*. In Electrochimica Acta 230, pp. 454–460.
- [4] Waldmann, Thomas et. Al. (2018): *Li plating as unwanted side reaction in commercial Li-ion cells – A review*. In Journal of Power Sources 384, pp. 107–124.
- [5] Abada, Sara et. Al. (2016): *Safety focused modeling of Li-ion batteries. A review*. In Journal of Power Sources 306, pp. 178–192.
- [6] Abada, Sara et. Al. (2018): *Combined experimental and modeling approaches of the Thermal Runaway of fresh and aged Li-ion batteries*. In Journal of Power Sources 399, pp. 264–273..
- [7] Edouard, Clément et. Al (2015): *Sensitivity Analysis of an Electrochemical Model of Li-ion Batteries and Consequences on the Modeled Ageing Mechanisms*, ECS Trans. 2015 66(9): 37-46.
- [8] Pastor-Fernández, Carlos et. Al. (2017): *A Comparison between Electrochemical Impedance Spectroscopy and Incremental Capacity-Differential Voltage as Li-ion Diagnostic Techniques to Identify and Quantify the Effects of Degradation Modes within Battery Management Systems*. In Journal of Power Sources 360, pp. 301–318.

## Authors



Thi Thu Dieu NGUYEN is currently a PhD candidate in Electrochemistry & Materials of Laboratoire de Réactivité et Chimie des Solides (LRCS), Hub de l'Énergie at the Université de Picardie Jules Verne. Her thesis project (2017 – 2020) is co-founded and co-supervised by IFP Energies Nouvelles, Institut National de l'Environnement industriel et des Risques (INERIS) and will be led by the LRCS. She obtained her Master degree (2016) in Renewable Energies, Science and Technology from l'Ecole Polytechnique, Université Paris-Saclay.

Her research work focused on the performance, ageing & safety of Energy Storage Systems, focusing on Ni-rich high energy Li-ion Batteries.